




High Uniformity White led On-Axis 200x200

PHLOX - LEDW - OA - 200x200 - SLLUB - Q - 1R - 24V

Illumination

Luminance minimum	≥ 2 800 cd/m² continuous mode
Uniformity minimum	≥ 60% (+/- 10%)
Source Type	White LED
Colour Temperature	5700°K (+/-500)
Expected Life	> 50 000 hours

Electrical

Input Voltage	24 VDC (continuous mode)
Input Current	≤ 2 A (continuous mode)
Cable length	2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
Connector	None
Cable pinout	
CE Conformity	Yes
Strobe mode	Max. Cur: 8A / Pulse Width: 10ms / Duty Ratio: 1/10

Outer unit

L x W x H	234 x 214.5 x 240 mm (9.21 x 8.07 x 9.45")
Housing Material	Black Anodized Aluminium
Weight	1 030 g (36.33 oz)
Mounting	4 mounting holes D 4 mm (0.157")

Environmental

Max. Operating Humidity	95% non-condensing	
Operating Temperature	50°C (122°F) max	
Storage Temperature	60°C (140°F) max	
Shelf life	12 months from date of purchase	
Max. temp. on housing	+80°C (+176°F)	

Do not cover the backlight when it's switched on.

Accessories

LED Dimmer: 28V-5A very compact and easy to use
Product key: PHLOX DIM LIGHT

Power supply: 110V and 220V
Product key: ALIM-24V-2.5A60WEU or ALIM-24V-2.5A60WUS

LED Strober: 28V - 5A (up to 40A in pulse mode)
Pulse width between 2µs and 10ms
Product key: PHLOX STROBE LIGHT




CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

RoHS directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity and luminance
- Seal of quality on the back

June 04, 2018

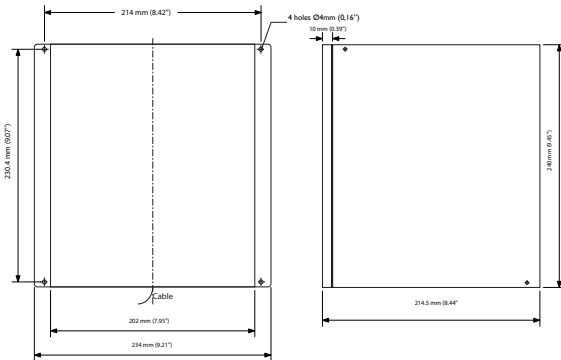

The white led On-Axis by PHLOX® offer the best uniformity on the market.

PHLOX® is the only manufacturer to provide a 3D uniformity and luminance certificate with every backlight. This data is also available on the quality control seal positioned at the back of every backlight.



DESIGNED

FOR YOUR APPLICATION

Bottle inspection (glass and plastic)
Particle measurement
Picture digitalization
Dimensional control
Shaping control
Quality control with transparency.

& YOUR INDUSTRIAL SECTOR

Glassmaking
Pharmaceutical/Cosmetics
Automotive
Agribusiness
Electronics
Aeronautics and space.

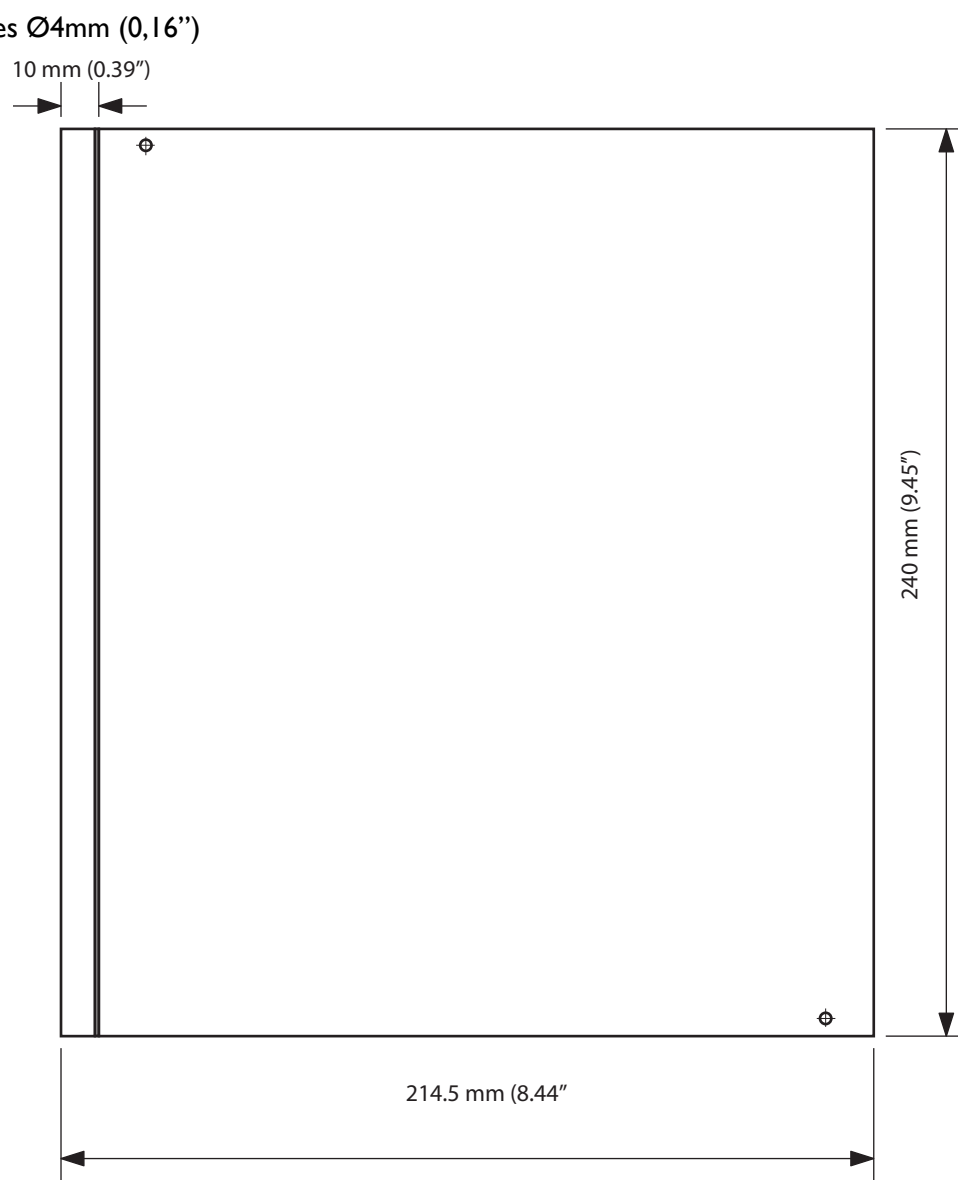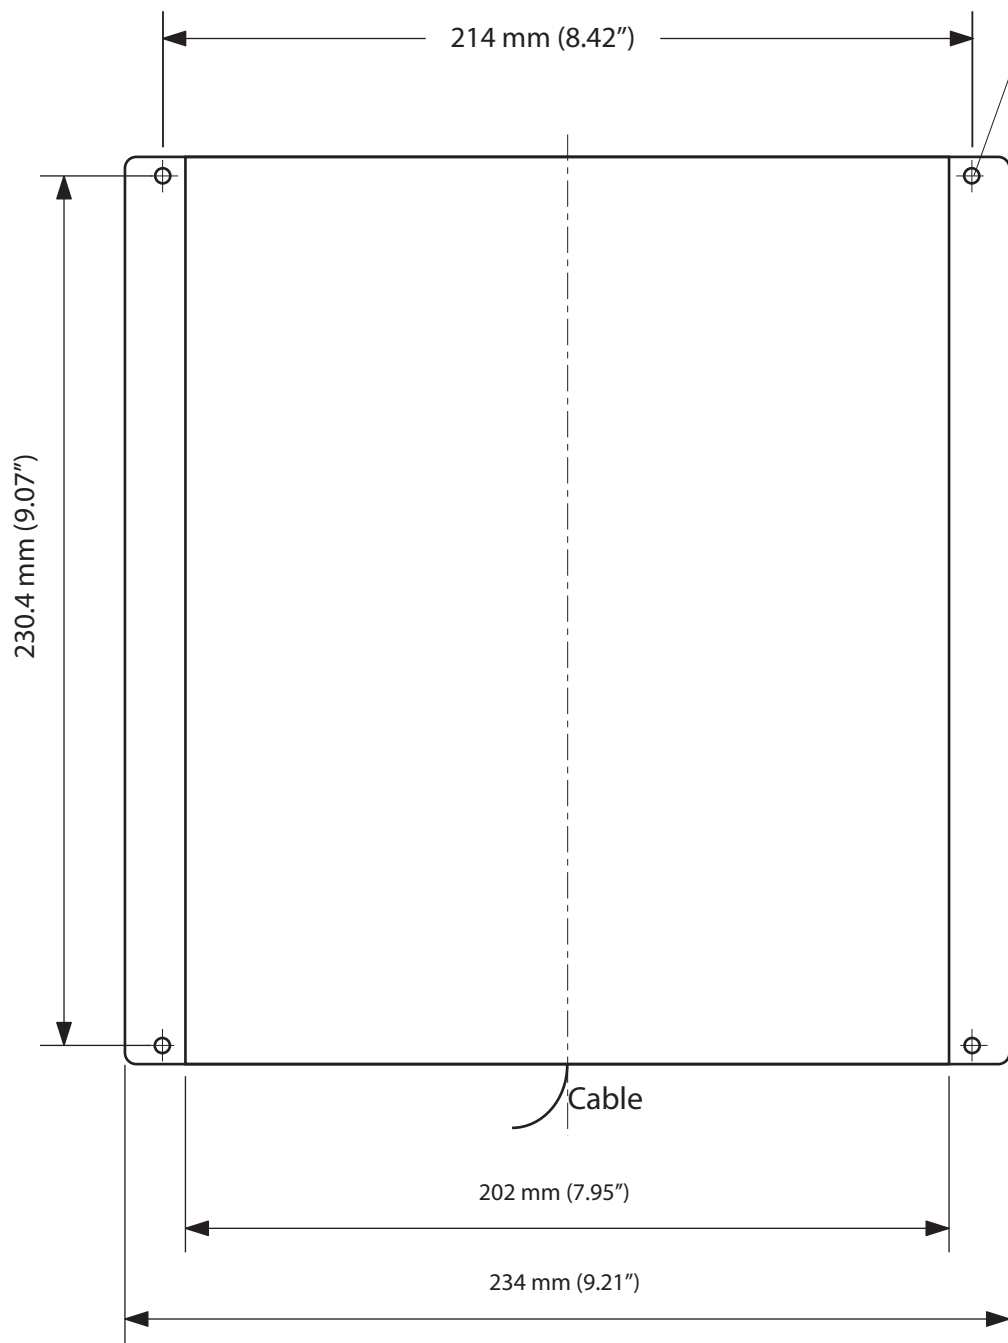

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

PHLOX-LEDW-OA-200X200-SLLUB-Q-1R-24V

TEL: 04 42 90 76 20
FAX: 04 42 90 76 21

